


BOL 1600 Series Bollards



BOL-1603

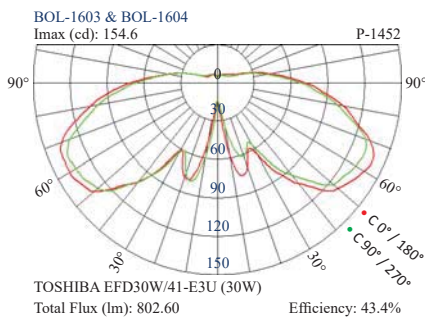

BOL-1604

Specifications:

- Body is Extruded From Aluminium
- Head is Die Casted From Aluminium Alloy
- Root Mounting Kit of Die Cast Aluminium Alloy
- Anodized High Purity Aluminium Louver
- Acrylic Diffuser Clear
- Finished With Powder Electrostatically
- Stove-Coated With Polyester / Epoxy
- Lampholder of Ceramic / Polycarbonate
- Pre-Looping With Textile Silicone Wire
- Connecting Devices of Nylon 3 Way x 2.5mm²
- Stainless Steel Screws
- Sealed With Silicone Gasket
- Degree of Protection: **IP65**
- Type of Protection: Class 1


Available Colour:

Black

Recommended:

Compact Fluorescent Lamp

G24d-3, 1 x 26W CFL



Ballast:

M.Ballast to suit 26W CFL

Optional 20W ES LED lamp

Installation:

It is recommended the bollard base is installed 30mm above ground level to avoid water pooling in the base which may rise to excessive condensation in the bollard head.

VICPOLE
STREETSCAPE SOLUTIONS

Dimension (mm):

